

DIMMABLE DRIVER - MAINS 230V

TRIAC TRAILING EDGE DRIVERS CONSTANT VOLTAGE 12V / 24V DC



Features

Indoor & Outdoor Application
 Operates best with Mains Trailing Edge Type Dimmers
 CE, ROHS & UKCA approved
 3 years warranty
 Regulated (Prolongs Led Life)
 Triple Safety Cutouts

Technical Data

Product Code	Voltage	Wattage	Input Voltage	Output Current	Power Factor	Efficiency	IP Rating	Dimensions (mm)
12V12TDIP67	12V	8.4-12W	180-270VAC ~50/60HZ	1A	>0.95	>85%	IP67	115x38x22
12V30TDIP67	12V	21-30W	180-270VAC ~50/60HZ	2.5A	>0.95	>85%	IP67	125x42x28
12V40TDIP67	12V	28-40W	180-270VAC ~50/60HZ	3A	>0.95	>85%	IP67	125x42x28
12V60TDIP67	12V	42-60W	180-270VAC ~50/60HZ	4.5A	>0.95	>85%	IP67	155x42x28
12V100TDIP67	12V	70-100W	180-270VAC ~50/60HZ	7.5A	>0.95	>85%	IP67	180x50x40
12V150TDIP67	12V	105-150W	180-270VAC ~50/60HZ	12.5A	>0.95	>85%	IP67	256x78x45
24V12TDIP67	24V	8.4-12W	180-270VAC ~50/60HZ	0.5A	>0.95	>85%	IP67	115x38x22
24V40TDIP67	24V	28-40W	180-270VAC ~50/60HZ	1.67A	>0.95	>85%	IP67	125x42x28
24V100TDIP67	24V	70-100W	180-270VAC ~50/60HZ	4.16A	>0.95	>85%	IP67	180x50x40

Packing Information




Product Code	Qty / Carton	Individual		Outer Carton		Barcode (EAN)
		Weight	Dimensions (mm) L X W X H	Weight	Dimensions (cm) L X W X H	
12V12TDIP 67	45pcs	208g	132 x 67 x 35	10.2kg	33 x 21 x 39	5060271813 155
12V30TDIP 67	33pcs	280g	172 x 70 x 43	10.3kg	33 x 21 x 39	5060271813 131
12V40TDIP 67	33pcs	280g	172 x 70 x 43	10.3kg	33 x 21 x 39	5060271813 124
12V60TDIP 67	24pcs	355g	210 x 76 x 40	9.7kg	29 x 23 x 41	5060271813 117
12V100TDI P67	24pcs	476g	210 x 76 x 40	12.8kg	29 x 23 x 41	5060271813 162
12V150TDI P67	10pcs	1.6kg	300 x 83 x 75	16.7kg	39 x 32 x 19	5060271813 148
24V12TDIP 76	45pcs	208g	132 x 67 x 35	10.2kg	33 x 21 x 39	5060271813 094
24V40TDIP 67	33pcs	290g	172 x 70 x 43	10.4kg	33 x 21 x 39	5060271813 063
24V100TDI P67	24pcs	498g	210 x 76 x 40	12kg	29 x 23 x 41	5060271813 100

Installation Instructions

Drawing:

12V DC 30W DIMMABLE

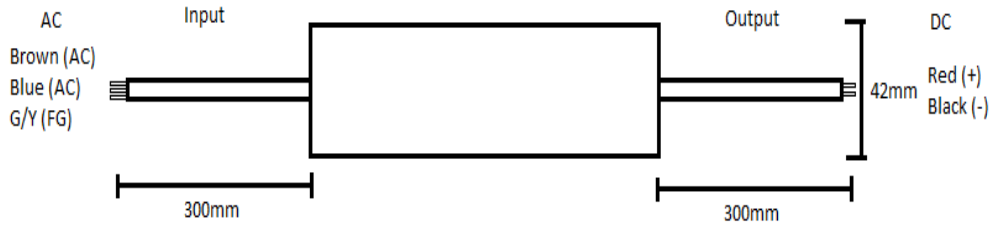

Connections Instruction:

A qualified electrician is required to install and make connections to the Dimmable LED drivers while connecting LED lighting products and Trailing Edge Type Dimmers.

Wiring Diagram:

