

LED GLASS TUBES 2FT-8FT


P.T.E SLEEVED




- Plug & Play LED Glass Tubes
- Supplied with LED Replacement Starter
- Inner P.T.E Sleeving for Extra Glass Shine and Smooth even Light Distribution (2ft-8ft)
- High Power Factor >0.9
- Solid Inner PCB's
- 220-240V Single Power Input
- CE/ROHS/ERP/EMC/UKCA

Schematic Wiring Diagram Conventional Fluorescent Fittings with Magnetic Ballast No Rewiring Required Change Starter to LED Replacement Starter

Step1. Lamp holder with starter

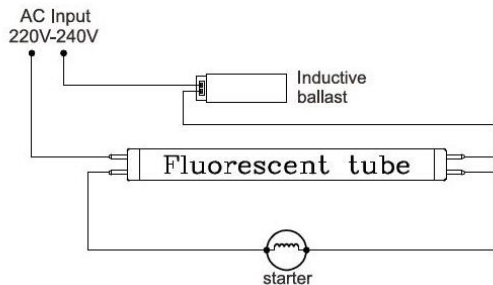


Step2.

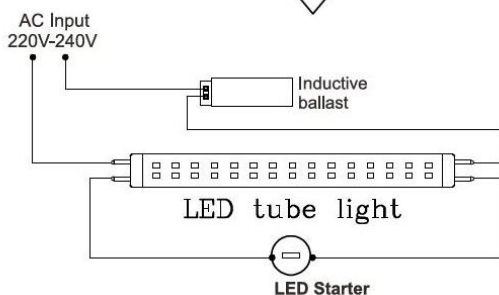


Schematic Wiring Diagram HF Fluorescent Fittings with Electronic Ballasts + Series Type Magnetic Ballasts (Bypass Ballast / Direct Single Input L + N Wiring)

Step1.

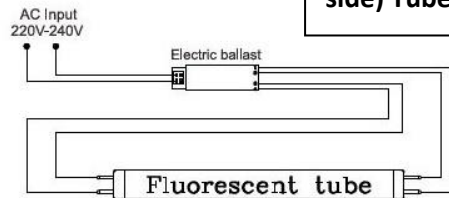


Observe AC Side Marked on (one side) Tube End

Step2.

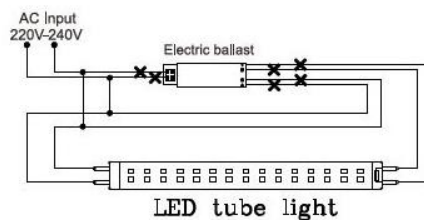

Step3.

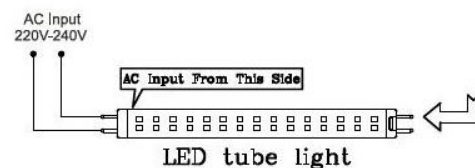

Part Number	DLST82K40		DLST82K65		DLST83K40		DLST83K65		DLST84K40		DLST84K65		DLST85K40		DLST85K65		DLST86K40		DLST86K65		DLST88K40		DLST88K65		
	Length	2ft 600mm	2ft 600mm	3ft 900mm	3ft 900mm	4ft 1200mm	4ft 1200mm	5ft 1500mm	5ft 1500mm	6ft 1800mm	6ft 1800mm	8ft 2400mm	8ft 2400mm	INPUT VOLTAGE (V)	220-240V	220-240V	220-240V	220-240V	220-240V	220-240V	220-240V	220-240V	220-240V	220-240V	220-240V
Power (W) Wattage	9W	9W	12W	12W	18W	18W	22W	22W	30W	30W	40W	40W	Colour Temperature K	4000K	6500K	4000K	6500K	4000K	6500K	4000K	6500K	4000K	6500K	4000K	6500K
Luminous Flux (LM)	990LM	990LM	1320LM	1320LM	1980LM	1980LM	2420LM	2420LM	3300LM	3300LM	4400LM	4400LM	View / Beam Angle (°)	120°	120°	120°	120°	120°	120°	120°	120°	120°	120°	120°	120°
Colour Rendering Index (CRI)	80	80	80	80	80	80	80	80	80	80	80	80	Power Factor	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9	>0.9
IP Rating	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	IP20	Shutter Resistant	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO	NO
Life Time	50000hr	50000hr	50000hr	50000hr	50000hr	50000hr	50000hr	50000hr	50000hr	50000hr	50000hr	50000hr	Warranty	3 Yr	3 Yr	3 Yr	3 Yr	3 Yr	3 Yr	3 Yr	3 Yr	3 Yr	3 Yr	3 Yr	3 Yr
Dimmable features	no	no	no	no	no	no	no	no	no	no	no	no	Materials	Glass/Pte	Glass/Pte	Glass/Pte	Glass/Pte	Glass/Pte	Glass/Pte	Glass/Pte	Glass/Pte	Glass/Pte	Glass/Pte	Glass/Pte	Glass
Body Colour	White	White	White	White	White	White	White	White	White	White	White	White	Emergency/features	no	no	no	no	no	no	no	no	no	no	no	White
Working temperatures	-25° to 40°	-25° to 40°	-25° to 40°	-25° to 40°	-25° to 40°	-25° to 40°	-25° to 40°	-25° to 40°	-25° to 40°	-25° to 40°	-25° to 40°	-25° to 40°	Energy Efficiency Index (A+)	A+ ECA	A+ ECA	A+ ECA	A+ ECA	A+ ECA	A+ ECA	A+ ECA	A+ ECA	A+ ECA	A+ ECA	A+ ECA	A+ ECA
Recyclable	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	YES	Carton Qty	25	25	25	25	25	25	25	25	25	25	25	25
Carton Gross Weight	3.6kg	5.1KG	6.4KG	8KG	8.3KG	11KG	Carton Size	66(L)x21(W)x21.5(H) CM	96(L)x21(W)x21.5(H) CM	126(L)x21(W)x21.5(H) CM	156(L)x21(W)x21.5(H) CM	186(L)x21(W)x22(H) CM	246(L)x21(W)x22(H) CM												